

**Universidade Federal de Minas Gerais  
Instituto de Ciências Exatas  
Departamento de Estatística**

**Congested Emergency  
Evacuation of a Population  
Using a Finite Automata  
Approach**

L. A. Pereira, L. H. Duczmal,  
and F. R. B. Cruz

**Relatório Técnico  
RTP-01/2010**

**Relatório Técnico  
Série Pesquisa**

# Congested Emergency Evacuation of a Population Using a Finite Automata Approach

**L. A. Pereira**

Faculty of Mathematics,  
Federal University of Uberlândia,  
38400-902, Uberlândia, MG, Brazil  
E-mail: leandro@famat.ufu.br

**L. H. Duczmal**

**F. R. B. Cruz<sup>1</sup>**

Department of Statistics,  
Federal University of Minas Gerais,  
31270-901, Belo Horizonte, MG  
E-mail: {duczmal,fcruz}@est.ufmg.br

**Abstract:** In this paper, we address a model for population evacuation during a congested emergency event. The model employs cellular automata for space modeling and the Schadschneider model to derive the transition probabilities for the motion of the pedestrians. We describe an extension of the transition probability model that includes a component to take into account the intuitive idea that speed can be considered a direct function of population density in the modeled environment. A simulation program was encoded in C++ because of the efficiency, portability, and robustness of the programming language; the program is available from the authors upon request for educational and research purposes. A real situation was modeled and simulated with the program. All the data generated were analyzed to show the efficiency and accuracy of the new approach. Interesting new insights emerged from this analysis; notably, the results obtained are consistent with a well-known extreme value distribution.

**Keywords:** Finite automata; evacuation total time; extreme value distribution.

## 1. Introduction

**E**mergency traffic computational models have drawn much attention from researchers in several areas, mainly because of the widespread availability of inexpensive and powerful computers needed to successfully address the sophistication of these models and also because of the obvious practical applications in many real-life situations. Usually, the

---

<sup>1</sup> Corresponding author. E-mail: [fcruz@est.ufmg.br](mailto:fcruz@est.ufmg.br). Phone: (+55 31) 3409 5929.

metric used to assess the quality of a practical scenario is evacuation time (Zarboutis & Marmaras, 2007). Estimating evacuation time involves situations in which people must evacuate an environment in the shortest time possible because of natural or man-made emergency events such as hurricanes, floods, wildfires, and chemical spills.

The models that have been developed in the past to study evacuation problems use a variety of different methods, including Monte Carlo simulations (Kirchner & Schadschneider, 2002a; Smith et al., 2009), queueing (Stepanov & Smith, 2009), and network theory (Cruz et al. 2005). Simulations can be considered in either a macroscopic or a microscopy way. Examples of the latter include the multi-agent cellular automata method (Hamagmi & Hirata, 2003; Song et al., 2006), which is the focus of this paper.


The main objective of this paper is to propose a new simulation model to analyze the traffic of people under emergency situations based on Schadschneider's (2002) model. The importance of this study arises from the importance of determining the best options or strategies for escape when site sheltering is not a preferred option, such as when infrastructure is damaged by hurricanes, floods, and fire.

The rest of this paper is organized as follows. In Section 2, we provide an overview of cellular automaton models and present some recent publications in the area. In Section 3, we present the proposed model. Some experiments that were performed are described and discussed in Section 4. Finally, in Section 5, we close the paper by summarizing our findings and discussing topics for future research in the area.

## **2. Overview**

Modeling the space floor by means of cellular automata is convenient especially because of the ease with which this approach models the location of doors, corridors, and barriers, which may be crucial in an emergency evacuation. Traffic flow usually occurs in an environment (such as rooms, corridors, and stairs) in which there is only a limited amount of space available. Each individual occupies a certain area in that space, and therefore, the movement of people depends on the existence of obstacles, the density of people and the location of doors. We assume that each person is contained in a cell. According to Wolfram (1994), the idea behind these models is to consider each position (or region) of the space as a cell, which is assigned a state. The state of each cell is changed according

to its state and its neighbors in the previous time step through a set of rules that attempt to mimic the biological and/or physical laws governing the real-life system. Figure 1 shows a cell in the environment and is represented by the central square. The arrows indicate all possible movement of a person in that cell. We assume that an environment can be fully distributed, so that each resulting area may contain just one person. A reasonable estimate for this area would be a square of size 44,7 cm ( $\sqrt{0.2}$  m) because at a density of 5 ped/m<sup>2</sup>, forward movement essentially comes to a halt (Tregenza, 1976). Notice that this value is somewhat in agreement with the cell size of 40 cm x 40 cm suggested by Kirchner et al. (2003).

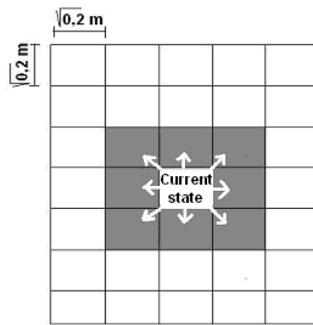

*Figure 1: Representation of a cell and its possible shifts*

As such, it is possible to describe the location of a person in terms of rows and columns ( $x, y$ ). Therefore, we can represent an environment as an  $n \times n$  array in which each position is a physical area of 0.2 m<sup>2</sup> that contains only one cell. This array is called an environment matrix. Each position ( $x, y$ ) of this matrix has a value that is equal to 1 when filled by a person and 0 when empty. It provides an aerial view of an environment simulation of people occupying (or not) a particular area. Moving from position ( $x, y$ ) to position ( $x, y+1$ ) indicates that a change of state (or position) of a person has occurred, which represents his/her displacement in the environment one step further.

For purposes of simulation, another matrix called the auxiliary matrix is necessary. This matrix has the same dimensions as the environment matrix described above but only includes environmental information such as the location of doors, fixed or moving obstacles (such as chairs or tables), and physical limits (i.e., walls). A numeric code is assigned to these obstacles, and during the simulation, this information constrains the modeled persons, who obviously cannot occupy space with these obstacles. The auxiliary matrix is provided by the user through an ASCII file.

To move through space, the probabilities of each person moving (or not) to a close, unoccupied neighborhood must be set. The transition probabilities have the same structure as that presented by Kirchner and Schadschneider (2002b), with several components that are used to represent the interactions between people, barriers, knowledge of the area, and the speed model (Frank & Dorso, 2009). A speed model dependent on the congestion status is a novelty introduced by the present paper into Schadschneider's (2002) model, as we will show below.

Regarding the interactions between people, the model allows for a trail to be left by other people who have followed the same path as the present person. This trail models the movement of people who are in an unknown place and would thus have to follow somebody else who already had found her/his way. For the automaton, such behavior could indicate the most visited areas, which have a higher probability of being chosen in the next step, especially for those who have not passed through this particular area. This component of the model is what we call a dynamic force because this probability is changed each time someone crosses the area. This dynamic force is more evident at the beginning and should have a steady decline because it is assumed that over time, people will have their own particular path rather than use somebody else's path. The interaction between people and obstacles in the field is called a static force because this force remains constant throughout the simulation. In fact, the static force is determined by the configuration of the environment that has been under analysis, which is considered static along time. This force is higher for the paths that lead to safe areas and smaller for areas that are close to walls, obstacles, and counter areas outside (Kirchner & Schadschneider, 2002b).

A new component of the model (and a main contribution of this paper) involves the assumption that the mean speed of a person decreases as the number of people increases and approaches the capacity of the environment under analysis. In other words, the speed of a user should be reduced if the neighborhoods two steps ahead are partially or fully occupied. Likewise, speed can increase when there is no occupation at least two steps forward.

As a final note, it is clear that the ideas discussed here do not apply exclusively to pedestrian traffic applications. See, for instance, Schadschneider (2006) for an interesting application to vehicular traffic.

### 3. The Proposed Model

All components previously mentioned are part of a model that predicts the final movement probability, that is, the probability that a person moves to a position  $(x, y)$ . The initial information is provided by the state matrix  $M$  of dimensions  $3 \times 3$ , which informs the initial probabilities, i.e., the prior probabilities of movement for a person in the environment to a position  $(x, y)$ . An example of matrix  $M$  may be seen in Figure 2-a, in which the probabilities of moving from cell to cell as well as the likelihood of non-movement (i.e., the probability of maintaining the same position) are determined. The values in matrix  $M$  should be defined by the analyst based on all available information on the phenomenon under analysis.

0.03	0.07	0.10
0.05	0.15	0.40
0.03	0.07	0.10

a) matrix  $M_1$  (2x2)

0.01	0.01	0.02	0.04	0.07
0.01	0.01	0.03	0.06	0.10
0.01	0.01	0.05	0.08	0.13
0.01	0.01	0.03	0.06	0.10
0.01	0.01	0.02	0.04	0.07

b) matrix  $M_2$  (5x5)

**Figure 2:** Examples of matrix  $M$ , which contains the prior probability of moving from one cell to another

The posterior probabilities are calculated using Schadschneider's (2002) model, which provides a way to update prior probabilities according to the following equation:

$$P_{xy} = N \exp(k_d D_{xy}) \exp(k_s S_{xy}) M_{xy} (1 - n_{xy})^{\xi_{xy}}. \quad (1)$$

Note that,  $P_{xy}$  is the posterior probability that a person moves to position  $(x, y)$ .  $M_{xy}$  represents the priori probability that a person moves to position  $(x, y)$ , obtained from matrix  $M$  (see examples in Figure 2).  $D_{xy}$  is a numeric value that represents the strength of the dynamic field for position  $(x, y)$ , which is obtained from a matrix  $D$  of equal size of the environment matrix. Finally,  $S_{xy}$  is a numeric value that represents the strength of the static field for position  $(x, y)$ , which is also obtained from matrix  $D$ . Matrix  $S_{xy}$  is a numerical value (or weight) that is determined beforehand and remains fix. Generally,

high weights are assigned to positions in the array environment that are close to the exits or located in more central areas. The closer to obstacles or walls is the position  $(x, y)$ , the lower are the values of  $D_{xy}$ . A constant  $k_s$  represents the contribution of this weight. Note that if  $k_s$  equals zero, it means that the influence of the static force is eliminated from the posterior probability  $P_{xy}$ . The constant  $N$  is simply a normalizing constant that ensures that  $\sum_{x,y} P_{xy} = 1$ . The number of people in cell  $(x, y)$  is represented by  $n_{xy}$ , but because each cell only holds at most one person at a time, the possible values are only 0 or 1. Finally,  $\xi_{xy}$  is a factor that takes into account obstacles and barriers such that it is 0 if there is an obstacle at position  $(x, y)$  and 1 otherwise.

Note that there is an internal counter for each position  $(x, y)$  in the environment matrix that accumulates points each time a position is visited by a cell that is stored in the same position  $(x, y)$  of matrix  $D$ . The more times a position  $(x, y)$  is visited, the greater is the probability of it being visited again from another person. Thus, matrix  $D$  contains the weights for each position  $(x, y)$  of the environment matrix, which can change each step. It is possible to decrease or increase the contribution of the weight of  $D_{xy}$  by means of  $k_d$ . Note that if  $k_d$  is equal to zero, we eliminate the influence of the dynamic force on the outcome of the model. Notice that for simulations in which the influence of a trail is more evident, as in a colony of insects, we can use high  $k_d$  values. However, for simulations of traffic flow, the trail should be strong so as to conveniently simulate environments in which the knowledge of persons of that environment is not as high (for example, shopping malls, fairs, and other events) as when people tend to follow the crowd in emergency events.

A rather straightforward assumption is that the trail effect decreases in most cases as time goes by. We assume that at some time, the effect of the trail will be reduced because people will be aware already about the best directions to follow, and as a result, the flow of movement will become almost independent of the trail effect. In Schadschneider's (2002) model, this effect is included by means of the following equation:

$$k_d^{(t)} = k_d^{(t-1)} \times Q,$$

where  $k_d^{(t)}$  represents the value at the current step  $t$ , and  $k_d^{(t-1)}$  represents the value at the previous step  $t-1$  such that  $P_{xy} \rightarrow M_{xy}$ , when  $t \rightarrow \infty$ . Factor  $Q$  ( $0 \leq Q \leq 1$ ) represents the decay rate associated with  $k_d$ .

Note that the usual 3x3 matrix  $M$  (Fig. 2-a) only provides the probabilities of moving to an immediate neighboring cell. However, if matrix  $M$  is extended to dimension 5x5 (Fig. 2-b), we can assign probabilities of moving to a neighborhood within a two-step distance of the current position in any direction. In this case, we derive a speed that is twice as high for such a person. The 3x3 matrix  $M$  is called  $M_1$ , and  $M_2$  represents the 5x5 matrix  $M$  (see Fig. 2-b). Thus, a modified equation for the posterior probabilities is derived as:

$$P_{xy} = N \exp(k_d D_{xy}) \exp(k_s S_{xy}) M_1^{V_{xy}} M_2^{(1-V_{xy})} (1 - n_{xy})^{\xi_{xy}}, \quad (2)$$

where  $M_{1xy}$  and  $M_{2xy}$  represent the numerical values of position  $(x, y)$  of the matrices  $M_1$  and  $M_2$ , respectively. The term  $V_{xy}$  only assumes the values of 0 or 1 to indicate which of the matrices  $M_1$  and  $M_2$  are used to compute  $P_{xy}$  for position  $(x, y)$ . The term  $V_{xy}$  assumes a value of 0 if the entire neighborhood two steps away is unoccupied, whereas the term assumes a value of 1 if there is any occupation within two steps surrounding the position  $(x, y)$ . Note that matrices  $M_1$  and  $M_2$  may not occur simultaneously.

Based on this procedure, the average speed of a person should double if there is available space to move (which is determined by matrix  $M_2$ ). Otherwise, the mean speed decreases.

#### 4. Experimental Results

The two models Eq. (1) and Eq. (2) were encoded in C++; the software is available directly from the website<sup>2</sup> or from the authors upon request for educational and research purposes. In the simulations performed in this paper, we assign  $Q = 0.99$  to represent a slow reduction of the trail effect. This value is usually arbitrary; further analysis of this issue should be undertaken in future studies. Note that matrix  $M$  (i.e.,  $M_1$  or  $M_2$ ) must be rearranged during the simulation. The numerical values of the array are rearranged according to the position occupied by the cell. Each division of the space contains a numeric code ranging from 1 to 8 that determines the preferred direction of a cell given its position in time. This scheme is depicted in Figure 3. These codes are provided by the analyst before simulation based on a table in ASCII format. This process represents human vision in the artificial world, as it is through vision that we recognize the preferred directions of displacement. Fig. 3 shows the arrows indicating the preferred direction for

---

<sup>2</sup>URL: <http://www.est.ufmg.br/ftp/duczmal/auto>.

each code. Note that the values of probabilities in the matrix  $M$  turn as we turn the direction.


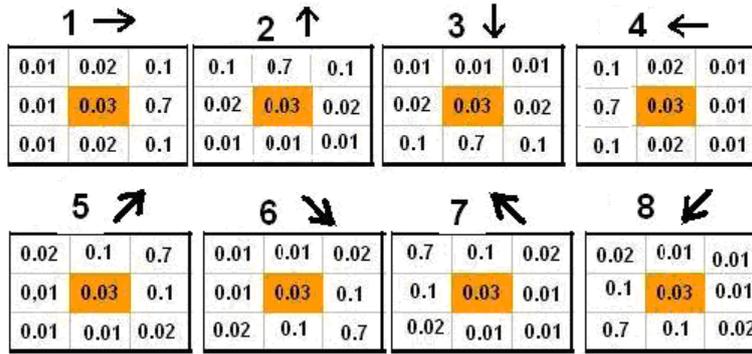


Figure 3: Configuration of matrix  $M$  for each cell location

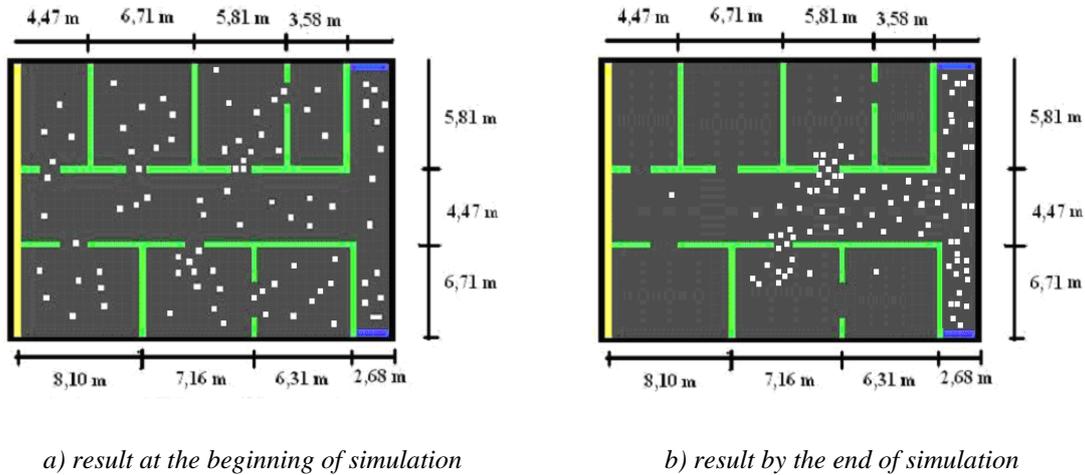

a) result at the beginning of simulation

b) result by the end of simulation

Figure 4: Simulation shots at two different times: start and after nearly all rooms are empty

The example we show here is the simulation of a rather complex environment presented in Fig. 4. In the figure, the doors are identified by traces of darkness. We remark that such an environment can be remodeled without requiring any changes in C++ code. Any configuration or reconfiguration of the environment may be performed by the user with the help of a program such as Microsoft® Excel. Fig. 4 shows snapshots at two crucial moments, i.e., right after the beginning of the simulation (Fig. 4-a) and approximately halfway through the simulation (Fig. 4-b).

To study overall evacuation time, we must establish some relationship between the time in minutes and number of steps of the simulation. We know that the movement of a person follows a discrete process in which displacement is rendered frame by frame. Each

step of the movement represents a step in the simulation. According to Tregenza (1976), the average walking speed of a lone occupant in an environment may be assumed to be about 1.5 m/s. Thus, some person that covers the distance of 44,7 cm ( $\sqrt{0.2}$  m, that is, a simple shift on the 0.2 m<sup>2</sup> grid that discretizes the environment) would take about 0.298 seconds to complete, resulting in Eq. (4), which provides the total evacuation time. Variable  $n_{sim}$  represents the total number of discrete steps performed in the simulation before the latest cell leaves the environment.

$$\text{totalevacuation time (min.)} = \frac{n_{sim} \times 0,298}{60}. \quad (3)$$

All simulations were carried out until all persons leave the environment, and then Eq. (3) was applied to provide the estimates of the total evacuation time in minutes. Table 1 shows the results of 1,000 replications for the models described by Eq. (1) and Eq. (2) with 5% and 10% occupation of the total space capacity. These densities were obtained from empirical studies (results not shown) regarding the maximum capacity of an environment in normal working conditions.

**Table 1:** Mean evacuation time (min) as a function of the occupation, for models (1) and (2)

Density		Eq. (1)	Eq. (2)	p-value
5%	Mean	1.3927 min.	0.7955 min.	0.0001 (t-test)
	StdDev	0.0731 min.	0.0536 min.	0.0000 (F test)
10%	Mean	1.6401 min.	0.9721 min.	0.0002 (t-test)
	StdDev	0.0914 min.	0.0546 min.	0.0000 (F test)


It is clearly shown in Table 1 that both models, i.e., the traditional model (Eq. (1)) and the new model (Eq. (2)), result in significantly different estimates ( $p$ -value < 0.05) for the mean evacuation time and variance. This result reinforces the significant effect of adding a new component to the model. As such, there may be some bias in the estimation of evacuation time if one does not take into account the changes in the average walking speed persons may experience in crowded environments. We see that variability is lower in the case in which we use the model described in Eq. (2). This result can be explained by the fact that Eq. (2) assumes that people who are away from the crowd will have an almost entirely clear way ahead of them so that they develop a higher speed until they

reach an overcrowded area and, consequently, develop a lower speed. This phenomenon is noticeable during real-time simulation.

Another aim of this study is to compare the variable obtained in the simulations, that is, evacuation time (or the elapsed time until the latest person vacates the environment), with a particular probability distribution function. The idea is to use some extreme value distribution, which is used to describe the distribution of maximum values in many practical situations, such as height of floods, temperatures, the age of oldest person to die in a city, and so on (Tomazella & Achcar, 1996.). This distribution would be most appropriate for a study about evacuation times. An acceptable fit to some extreme value distribution for the data obtained from the simulation model would be an indication that the simulation model may represent the real-life phenomenon. A random variable that follows the distribution of the maximum extreme values has the following probability density function:

$$f(x) = \frac{1}{\theta} \exp\left(\frac{-(x-\varepsilon)}{\theta}\right) \exp\left(-\exp\left(\frac{-(x-\varepsilon)}{\theta}\right)\right), -\infty < x < \infty, \quad (4)$$

where  $\theta$  ( $\theta > 0$ ) is a scale parameter, and  $\varepsilon$  ( $-\infty < \varepsilon < \infty$ ) is a location parameter.

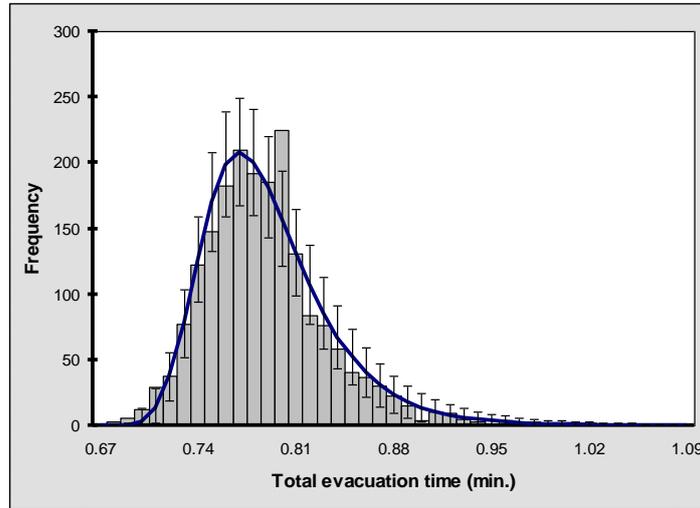

**Figure 5:** Simulated total evacuation time (min.), fitted curve, and error bars

A histogram of the total evacuation time, the fitted curve according to the extreme value distribution, and the error bars are shown in Fig. 5, which is based on a 2,000 step simulation performed under the same conditions used to obtain the results in Table 1 (results not shown are similar for other configurations). The model appears to show good

fit. In fact, a  $\chi^2$  goodness-of-fit test shows that the model is suitable ( $p$ -value = 0,137447) to describe the set of data obtained in the simulations<sup>3</sup>.

Mean-square errors (SQE) were computed for the extreme value distribution and some other common probability density functions. The results can be seen in Table 2. Notice that from an analysis of SQE, the extreme value distribution produced the lowest value among all distributions tested. This value is an indication that the extreme value distribution may be one of the most appropriate models for adjusting evacuation times estimated from a simulation of the model described by Eq. (2).

*Table 2: Mean-square errors for simulated data on evacuation time and four probability density functions*

Distribution	Mean Square Error
Gama	379.0
Lognormal	273.1
Weibull	656.5
Extreme Value	183.9

## 5. Conclusions and Final Remarks

This paper discusses improvements in a multi-grid model for pedestrian dynamics based on bionics-inspired cellular automata. The newly-added feature is useful to model congestion effects, which include a well-known reduction in the average pedestrian walking speed and an increase in the number of people in an environment. A program was encoded and made available for research and educational purposes. Computational results have shown that the proposal is quite promising. After analyzing the data generated by the simulation model, we conclude that the inclusion of the new features seems to contribute significantly to making the evacuation simulations more realistic. In fact, adjusting the model to an extreme value distribution indicates a close similarity between the simulation results and the theoretical probability model.

The program developed here is useful for future studies, such as the investigation of the effect of environmental settings at the time of evacuation. Also important is the effect of the population density in conjunction with environmental settings, as the evacuation time may be strongly affected by the location of exits and obstacles. Additionally, it should be

<sup>3</sup>For details on  $\chi^2$  goodness-of-fit tests and an interesting application in fraud detection, see Geyer & Williamson (2004).

worthwhile to analyze methods to search for ideal evacuation routes in order to optimize evacuation times. These are but a few interesting topics for future research in this area.

### **Acknowledgments**

The research of Frederico Cruz has been partially funded by CNPq (Conselho Nacional de Desenvolvimento Científico e Tecnológico; grants 201046/1994-6, 301809/1996-8, 307702/2004-9, 472066/2004-8, 304944/2007-6, 561259/2008-9, 553019/2009-0, 550207/2010-4), by CAPES (Coordenação de Aperfeiçoamento de Pessoal de Nível Superior; Grant BEX-0522/07-4), and by FAPEMIG (grants CEX-289/98, CEX-855/98, TEC-875/07, and CEX-PPM-00401/08).

### **References**

Cruz, F. R. B., Smith, J. M., Medeiros, R., 2005. An M/G/c/c state dependent queueing network simulation model. *Computers & Operations Research* 32(4), 919-941.

Frank, G., Dorso, C., 2009. Statistical behavior of pedestrians under panic. In: 2009 Joint Statistical Meetings – JSM 2009, 3878-3883.

Geyer, C. L., Williamson, P. P., 2004. Detecting fraud in data sets using Benfords law. *Communications in Statistics - Simulation and Computation* 33 (1), 229-246.

Hamagami, T., Hirata, H., 2003. Method of crowd simulation by using multiagent on cellular automata. *IEEE/WIC International Conference on Intelligent Agent Technology (IAT'03)* 46-52.

Kirchner, A., Klupfel, H., Nishinari, K., Schadschneider, A., Schreckenberg, 2003. Simulation of competitive egress behavior: Comparison with aircraft evacuation data. *Physica A* 324, 689-697.

Kirchner, A., Schadschneider, A., 2002a. Cellular automaton simulations of pedestrian dynamics and evacuation processes. In: Fukui, M., Sugiyama, Y., Schreckenberg, M., Wolf, D. E. (Eds.) *Traffic and Granular Flow '01*, 531-536.

Kirchner, A., Schadschneider, A., 2002b. Simulation of evacuation processes using a bionics-inspired cellular automaton model for pedestrian dynamics. *Physica A* 312, 260-276.

- Schadschneider, A., 2002. Bionics-inspired cellular automaton model for pedestrian dynamics. In: Fukui, M., Sugiyama, Y., Schreckenberg, M., Wolf, D. E. (Eds.) *Traffic and Granular Flow '01*, 499-509.
- Schadschneider, A., 2006. Cellular automata models of highway traffic. *Physica A* 372, 142-150.
- Smith, A., James, C., Jones, R., Langston, P., Lester E., Drury, J., 2009. Modelling contra-flow in crowd dynamics DEM simulation. *Safety Science* 47, 395-404.
- Song, W., Xu, X., Wang, B-H, Ni, S., 2006. Simulation of evacuation processes using a multi-grid model for pedestrian dynamics. *Physica A* 363(2), 492-500
- Stepanov, A., Smith, J. M., 2009. Multi-objective evacuation routing in transportation networks. *European Journal of Operational Research* 198, 435-446.
- Tomazella, V. L. D. ; Achcar, J. A., 1996. Extreme value regression models: An useful reparametrization for the survival function. *Journal of Applied Statistics* 23(1), 59-68.
- Tregenza, P. R., 1976. *The design of interior circulation*. Van Nostrand Reinhold Company, New York, NY.
- Wolfram, S., 1994. *Cellular automata and complexity*. Addison-Wesley publishing Company, New York, NY.
- Zarboutis, N., Marmaras, N., 2007. Design of formative evacuation plans using agent-based simulation. *Safety Science* 45, 920-940.